




TechnicalData

Power 100-240V - 12V1A adaptor Rechargeable Battery: 6V4Ah Estimated working time: 320hrs	Display LCD with backlight	Power Consumption 12mA - no backlit 36mA - with backlit
Pan Dimensions 315 x 250mm	Units Kg lb	Operating Temperature 0°C - 40°C
Capacity 3 6 15 30Kg	Shortcut U.W. 40 Memories	Approval CE
Division 0.1 0.2 0.5 1.0g	Sampling Speed 20times/second	RS232 Optional
Net Weight 6Kg	Non-linearity $\leq 0.01\%F.S.$	

Features

- Stainless steel housing <
- Big s.s pan 315 x 250mm <
- Big LCD display with backlit <
- Rechargeable 6V battery <
- 4 height adjusting feet <
- High accuracy of 1/30,000 <
- Multi-units exchange <
- 40 PLU of unit weight <
- Weight accumulation <
- Unit weight recalculate <
- Recall of memory weight <
- Auto power off setup <
- Optional RS232 interface <
- Optional Bluetooth output <

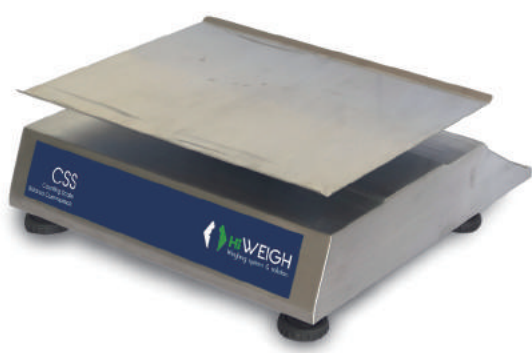

Models

Part No.	100820	100821	100822	100823
Models	CSS3	CSS6	CSS15	CSS30
U.P.(USD)	\$276.00	\$276.00	\$276.00	\$276.00
Capacity	3kg	6kg	15kg	30kg
Division	0.1g	0.2g	0.5g	1g
Pack Size	78 x 45 x 35cm (4pcs)			
Weight	26kg (4pcs)			