


# WEIGHT INDICATOR K8(s)

Clear Read in the sun

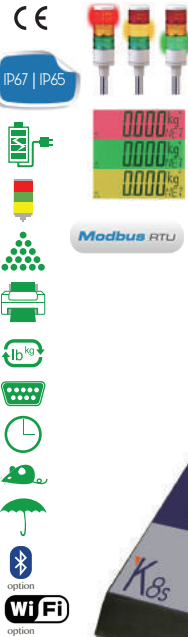

## IP67&IP65

K8 with Double O-ring for the housing, independent sealed PCB case, rugged PBT housing; with IP67 protection, it can be used in the field of meat, fish process or any other food industry, chemical materials, pharmacy, etc. K8s with SUS304 IP65 housing, and s.s bracket.

## Checkweigh

It gives three options of checkweigh function, you can select the built-in small LED lights for checkweigh alarming, also you can set the different backlight for limitation of the weight, or you can connect with an extra alarming 3-color lights.

## PowerSource

100-240V AC Direct  
9-24V DC Direct  
7.4V6800mA Li-ion Battery  
6V1200mA Lead-acid Battery

## Interface

Double RS232  
4 x OUTPUT  
1 x IN\*  
Optional Bluetooth or WiFi  
\* for pedal or mechanical switch, functions can be set with zero, tare or print.



## Models

Part No.	110003	110004	110005	110006	110007	110008	110009	110010
Models	K8AC	K8DC	K8Li	K8La	K8sAC	K8sDC	K8sLi	K8sLa
Type	AC	DC	Li-ion	Lead-Acid	AC	DC	Li-ion	Lead-Acid
Power	100-240V	9-24V	7.4V6800mA	6V1200mA	100-240V	9-24V	7.4V6800mA	6V1200mA
Weight	2.8kg	2.8kg	2.9kg	2.9kg	3.2kg	3.2kg	3.3kg	3.3kg

Moorange  
Reason Your Weighing

Moorange  
Reason Your Weighing



Touching



Modbus RTU

Clear Read in the sun

IP68|IP69K



## IP68&IP69K

Double O-ring for the housing, independent sealed PCB case, transparent PC front housing and touch buttons, all give the highest protection class till IP68 and IP69K, it can be used perfectly in the field of meat, fish process or any other food industry, chemical materials, pharmacy, etc. It can be washed by the high pressure hot water - 100 bar (1450 psi) and 80°C, suitable for almost all harsh working environment.

## Stronger Design

PC alloy front housing and PBT back housing, give the indicator the high strength, no worry any more about the damage to it caused by falling, crudely use of some careless workers.



## TechnicalData

**Power**  
100-240V 50/60Hz AC  
9-24V DC  
7.4V6800mA | 6V1200mA  
Rechargeable battery

**Resolution**  
1/3,000 - 1/30,000

**Material**  
PC + PBT

**Protection**  
IP68  
IP69K

**Load Cell**  
1-6 350Ω  
1-12 700Ω

**Display**  
FSTN multi-color backlight  
30mm height

**Units**  
Kg/lb/g/oz

**Output**  
RS232 \* 2  
optional Bluetooth  
optional WiFi

**Operating Temperature**  
-10°C - 40°C

**Approval**  
CE

It gives three options of checkweigh function, you can select the three small LED lights for checkweigh alarming, also you can set the different backlight for different range of the weight read, or you can connect with an extra alarming light with three colors.



## PowerSource

100-240V AC Direct  
9-24V DC Direct  
Panasonic 7.4V6800mA Li-ion Battery  
6V1200mA Lead-acid Battery

## Interface

Double RS232  
4 x OUTPUT  
1 x IN\*  
Optional Bluetooth or WiFi  
\* for pedal or mechanical switch, functions can be set with zero, tare or print.

## Models

Part No.	110011	110012	110013	110014
Models	K9AC	K9DC	K9Li	K9La
Type	AC	DC	Li-ion	Lead-Acid
Power	100-240V	9-24V	7.4V6800mA	6V1200mA
Weight	2.8kg	2.8kg	2.9kg	2.9kg