


PLATFORM SCALE BSE



Aluminum Platform

Rugged aluminum cast platform
SUS304 stainless steel cover
Heavy duty design up to 500Kg
Aluminum pole holder
Overloading protecting

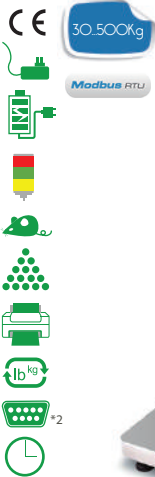

IP65 Load Cell

Standard M15/M17 load cells
Aluminum alloy material, IP65

K7a Indicator

Big backlit FSTN LCD display
- the weight can be read clearly even in the sun.

With rechargeable 6V4Ah battery
100-240V power source directly
kg/lb, g/oz units exchange

Real-time clock
Checkweigh with three LED lights
Animal weighing function, accumulating, hold
x10 accuracy, counting, zero, tare, printing, etc.
Default with 2 RS232 interface
Option of Bluetooth output
Option of WiFi output
Option of Relay output



Options

Optional adjustable pole supporter
Optional rectangular pole

Models

Part No.	100096	100097	100098	100099	100100	100101	100102	100103	100104
Models	BSE3030	BSE3060	BSE3150	BSE4060	BSE4150	BSE4300	BSE5150	BSE5300	BSE5500
Capacity	30kg	60kg	150kg	60kg	150kg	300kg	150kg	300kg	500kg
Division	5g	10g	20g	10g	20g	50g	20g	50g	50g
Size	300 x 400mm			400 x 500mm			450 x 600mm		
Weight	9kg			14.5kg			18.5kg		

Moorrange
Reason Your Weighing



SUS304 SUS316 s.sMaterial

SUS304 s.s. platform - models1
SUS304 s.s pan - models1
SUS316 s.s. platform - models2
SUS316 s.s. pan - models2
Washdown design, easy clean
Silicon buffering pan supporter
Overloading protection
4 adjusting stainless steel feet
Capacity up to 150Kg
Three platform sizes for choose
Customized platforms available

IP68 | IP69K LoadCell

OIML approved stainless steel load cells
17-4Ph material, IP68/IP69K protection
Easy and safe for cleaning with water
BM6A | BM6E - models1
BM6A | BM6G - models2

K9 Indicator

Double O-ring for the housing, independent sealed
PCB case, transparent PC front housing and touch buttons,
All give the highest protection class till IP68 and IP69K, it can be used perfectly in the field of meat, fish process or any other food industry, chemical materials, pharmacy, etc. It can be washed by the high pressure hot water - 100 bar(1450 psi) and 80°C, suitable for almost all harsh working environment.

PC alloy front housing and PBT back housing, give the indicator the high strength, no worry any more about the damage to it caused by falling, crudely use of some careless workers.

Models * 1/15,000 division optional

Part No.	100171	100172	100173	100174	100175	100176	100177	100178	100179
Models 1	K9T3006	K9T3015	K9T3030	K9T3415	K9T3430	K9T3460	K9T4030	K9T4060	K9T4150
Part No.	100180	100181	100182	100183	100184	100185	100186	100187	100188
Models 2	K9T3007	K9T3016	K9T3031	K9T3416	K9T3431	K9T3461	K9T4031	K9T4061	K9T4151
Capacity	6kg	15kg	30kg	15kg	30kg	60kg	30kg	60kg	150kg
Division	1g	2g	5g	2g	5g	10g	5g	10g	20g
Size	300 x 300mm			300 x 400mm			400 x 400mm		

K9T PLATFORM SCALE






option



option



option

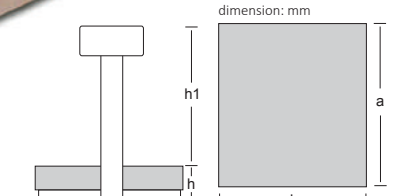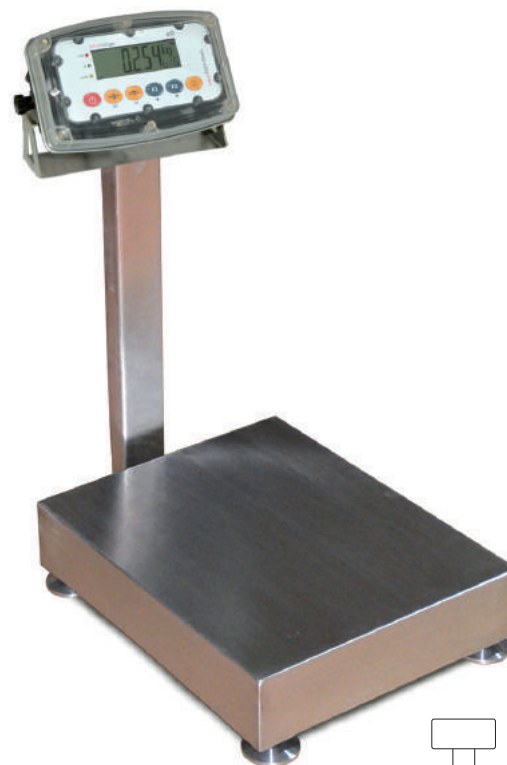

Models	a	b	h	h1
K9T3	300	300	150	600
K9T34	400	300	162	620
K9T4	500	400	162	620

Power
100-240V 50/60Hz AC / 9-24V DC
7.4V6800mA, or 6V1200mA

Display
FSTN multi-color - 30mm

Units
Kg/lb | g/oz

Output
2 x RS232 | optional Bluetooth

Operating Temperature
-10°C - 40°C

Approval
CE

Platform & Capacity
300 x 400mm | 400 x 400mm
400 x 500mm
6 - 150kg

Protection
IP68 | IP69K